


*Space Saving!*

DPDT—2 AMP Relays for Low Voltage applications where small size and mounting ease are required.


Terminals accept up to 16AWG wire.

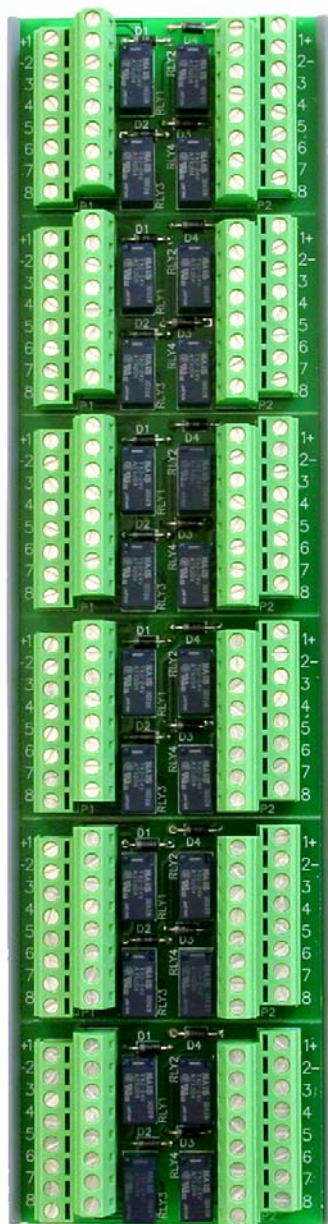

**Note:**

*Basic board consists of 6 break-off Modules (24 Relays) mounted in Snaptrack, as shown.*

*Available per Module only. There are four Relays per Module.*

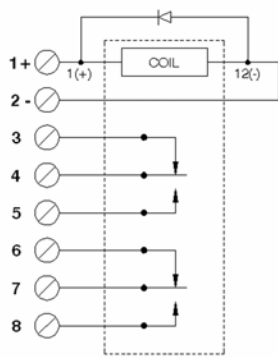

**WIRING SCHEMATIC  
(per Relay)**


**Relay Specifications:**

**UL File:** E43149

**Voltage:**  
24VDC or 12VDC

**DPDT Contacts**  
**Contact Rating:**  
2A @ 30VDC  
.5A @ 125VAC

**Coil Draw:**  
5.8MA @ 24VDC

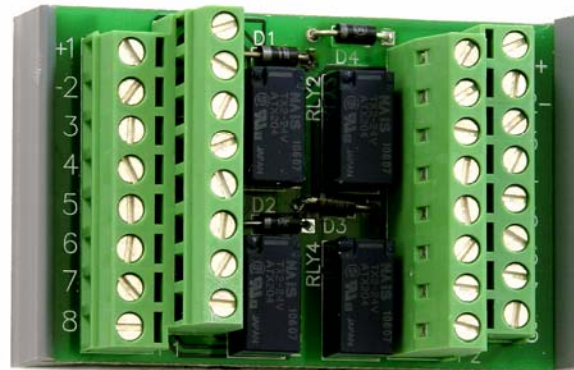

*1 module (4 Relays) shown above.*

**Actual Size**

**Dimensions:**  
2.85”w x 11.1”h  
(6 Module 24 relays)

**Dimensions:**  
2.85”w x 1.85”h  
(1 Module 4 relays)

**Ordering Information:**

Part Number: EP2015 + Voltage = ( EP2015-xx ) i.e. EP2015-24 (at 24VDC)

**Notes:**

- Sensitive Relay Coils are available (2.9ma @24VDC), please contact factory.
- One Side of the Coils and/or contacts can be wired as a common upon request.